


RT Series

ROLLING TAILBOARD



MODELS: RT35, RT40, RT50 and RT60

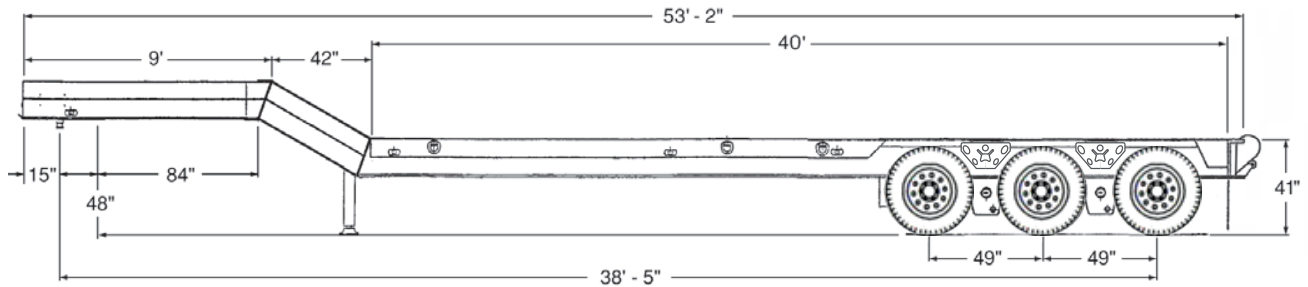

TRI AXLE MODEL SHOWN

STANDARD RT SERIES FULL WIDTH NECK FEATURES

- 30° slope from neck to bed
- Two speed landing gear
- 2" hardwood lumber decking
- 4 "D" rings per side
- Heavy duty spring suspension
- 25,000# capacity axles
- 10 stud / 5 spoke hubs
- 16.5" X 7" brakes
- Air brake with ABS where applicable
- 255/70 R 22.5 radial tires
- 12 volt sealed lighting as per DOT
- 8" tail roller with integrated bearings
- 2" pin pockets

AVAILABLE OPTIONS

- Other lengths: gooseneck, load deck, beaver tail
- Other widths and load heights
- Lockable storage
- Additional "D" lashing rings
- Additional axles
- Other tire sizes
- Air ride suspension and other suspensions
- Motor grader ramps
- Collapsible landing gear
- Pick up eye/duck bill

Model	Capacity	No of Axles	Deck Length	LOA
RT-35	70,000#	2 each	40'	53'-2"
RT-40	80,000#	2 each	40'	53'-2"
RT-50	100,000#	3 each	40'	53'-2"
RT-60	120,000#	3 each	40'	53'-2"

NOTES:



Rugged Durability, Performance, Value.

6101 South McIntosh Road, Sarasota, Florida 34238 • For additional information or your Witzco Challenger dealer nearest you, Call: (941) 922-5301 • Toll Free: 1-888-922-9900 • Fax: (941) 924-2402 • E-mail: info@witzco.com • Website: www.witzco.com

Model: RT Full Width Gooseneck

GENERAL DATA SHEET - PART NUMBER RT 35, RT 40, RT 50, RT 60

Model: RT Full Width Gooseneck

Trailer weight: 21,970# +/- 3%

Gross vehicle weight rating: 121,970#

DIMENSIONS

- Overall Length: 53'2"
- Overall Width: 8' 6"
- Load deck length: 9' upper / 40' lower
- Load deck height: 41" unloaded (lower deck)

GOOSENECK STYLE & DIMENSIONS

- Style: Rigid style, Full width gooseneck with 30 degree slope to lower deck
- 5th wheel height: 48"
- Swing clearance: 84"
- Kingpin setting: 15"
- Kingpin size: 2"

Landing Gear:

- 2 speed with standard sand shoe

BED STRUCTURE

- Main frame: W16x77 beam A992 grade 50
- Side Beam : W12x22 beam A992 grade 50
- Cross members: W8x10 full width, fully welded
- Decking: 2" Oak decking
- 8" tail roller with integrated bearings
- 2" pin pockets

SUSPENSION

- Hutch #H9700US-49AC-UN/MT Spring and equalizer, #365-00 heavy duty 3 leaf spring

AXLES

- 3 Hendrickson 5" round 77.5" track 25,000# capacity w/Hub piloted wheels

TIRES

- 255/70R 22.5 Radial Tires

BRAKE SYSTEM

- 16-1/2" x 7" air S cam w/automatic slack adjusters
- Type 30 and 30/30 brake chambers

LIGHT SYSTEM

- Sealed modular wire harness
- 12-volt rubber mounted sealed beam lights
- Reflective tape as per D.O.T. specifications

LASHING "D" RINGS

- 4 per side of deck

FINISH

- 1 coat rust inhibitive enamel primer
- 2 coats high performance water bourne one part urethane
- Choice of 7 factory standard colors