




AM200-6 ER DIMENSIONS

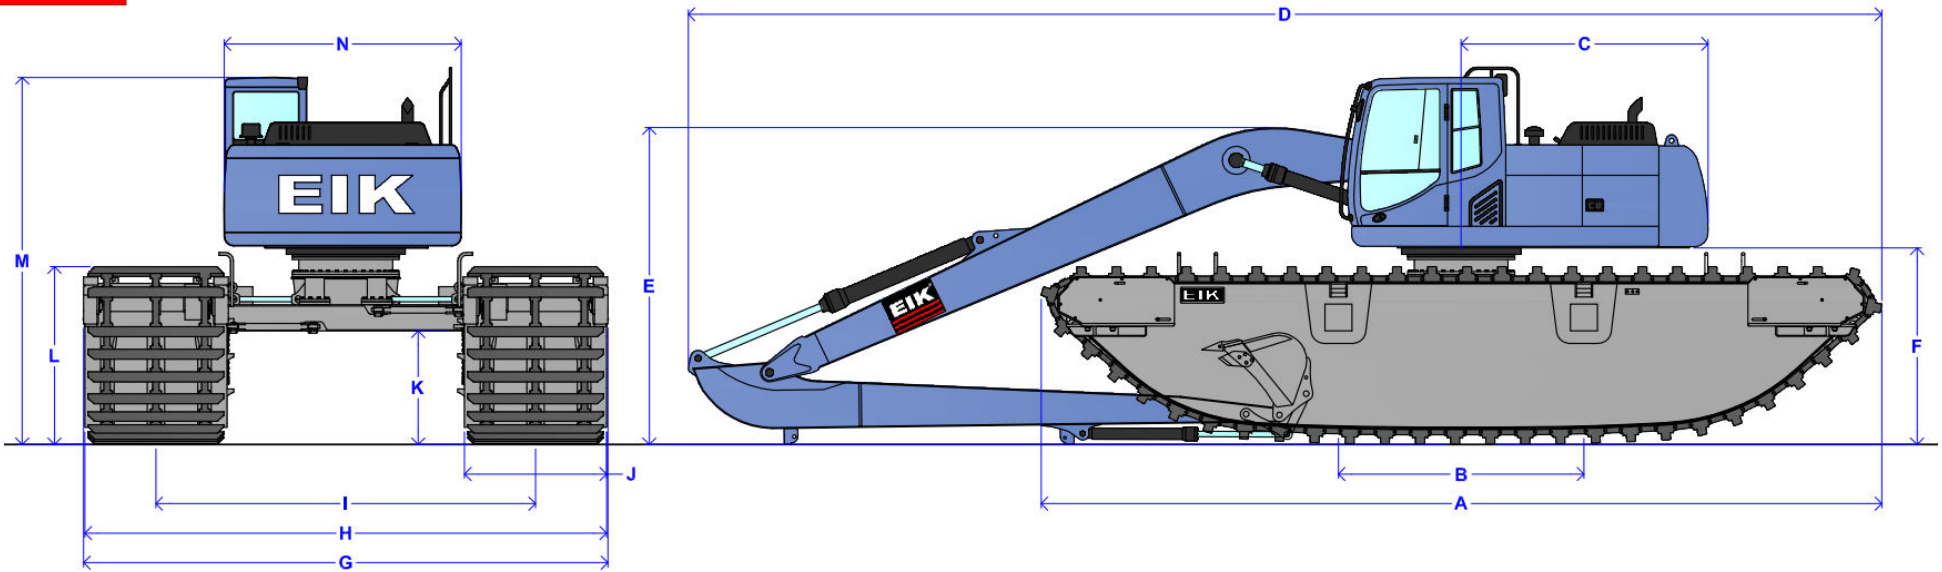

		20 ton (44,000 lb) class excavator	
		m	ft
A	Maximum Track Length	9.63	31' 7"
B	Track Length On Ground	4.50	14' 9"
C	Rear Upperstructure Length*	2.85	9' 4"
D	Overall Length**	13.55	44' 6"
E	Height Of The Boom **	3.47	11' 5"
F	Upperstructure Clearance*	2.17	7' 1"
G	Overall Width (min/max)	4.50 / 5.98	14' 9" / 19' 7"
H	Track Width (min/max)	4.47 / 5.95	14' 8" / 19' 6"
I	Track Gauge (min/max)	2.85 / 4.33	9' 4" / 14' 3"
J	Pontoon Width	1.62	5' 4"
K	Minimum Ground Clearance	1.30	4' 3"
L	Track Height	2.03	6' 8"
M	Overall Cab Height*	4.08	13' 5"
N	Upperstructure Overall Width*	2.54	8' 4"
P	Estimated Water Level	1.55	5' 1"

Note:

- * Varies on excavator brand upperstructure
- ** Based on EIK 14 meter Long Reach Package
- All dimensions are approximate